
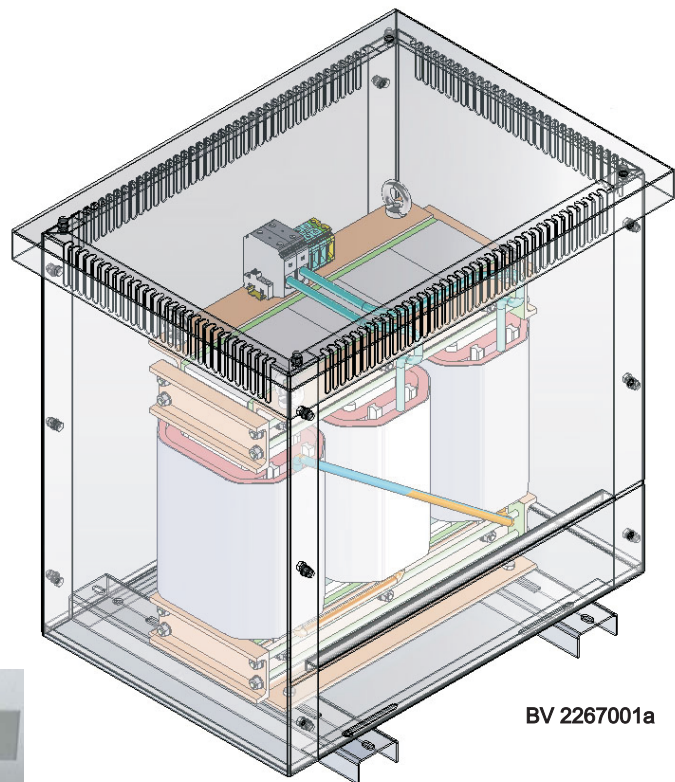


Dreiphasen-Einphasen Transformatoren

three-phases-one-phase transformers

Type	Bautyp	Sek.- Leistung	Primär- spannung	Sekundär- spannungs	Abmessungen	Montage- löcher			Kupfer- Gewicht	Gesamt- Gewicht	BV
type	type size	sec.- power	primary voltage	secondary voltage	in mm	f 1	f 2	f 3	copper	total	
					b	l	h				
TEOKET	300/300/78	5,0 kVA	3 x 400 V	1 x 230 V	610	430	460	409 264 11	20	60	21006000
TEOKWT	300/300/78	5,5 kVA	3 x 400 V	1 x 320 V	357	168	365	- - -	20	52	28021001
TEOKET	350/350/73	7,5 kVA	3 x 400 V	1 x 230 V	670	490	480	409 460 11	32	80	26046001
TEOKWT	350/350/133	15,5 kVA	3 x 400 V	1 x 320 V	418	233	425	316 203 -	34	108	28021000
TEOKWT	350/350/133	16 kVA	3 x 400 V	1 x 230 V	670	490	480	409 460 11	34	130	32058001
TEOPET	400/400/110	18,4 kVA	3 x 400 V	1 x 230 V	770	540	620	440 510 11	60	160	2603002
TEOKWT	500/500/125	37 kVA	3 x 440 V	1 x 230 V	770	580	760	440 540 11	105	235	2267001a
TEOKET	600/600/150	100 kVA	3 x 400 V	1 x 380 V	1050	785	1055	555 750 18	150	430	18015001



BV 2267001a



BV 2603002

